


# VicOffice Wall

WORKSPACES

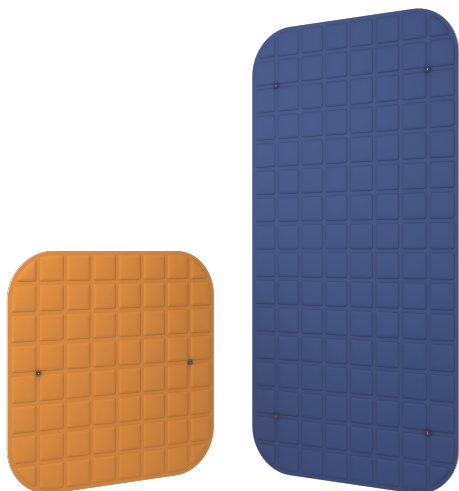


## Description

VicOffice Wall is a thin acoustic panel that can be easily mounted and dismantled to any glazed panel, i.e. not compromising the glazing cleaning process. Being a thin panel, and therefore having low performance on medium frequencies, Vicoustic has developed its installation mechanism to create an air-gap between the glaze and VicOffice Wall, and in this way increase its performance on the medium/High frequencies, exactly where speech frequencies are.

## Features

- Premium high density PET Wool
- High Performance in medium and high frequencies
- Light weight
- Easy to install
- Easy to clean and maintain

## Performance

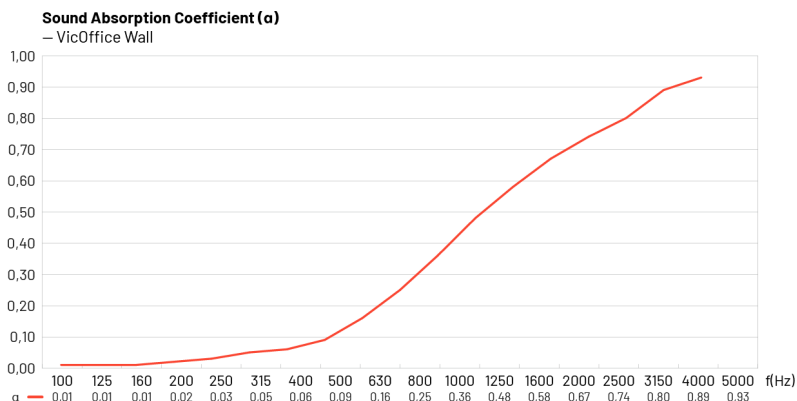

NRC: 0.30

## Available Finishes\*

### Solid Colors

\* Different batches may show a color variation

### Dimensions\*\*

- a) 595x595x10 mm / 23.42"x23.42"x0.39";
- b) 1190x595x10 mm / 42.91"x23.42"x0.39".

\*\* For each panel. Please notice that the dimensions of these panels have a tolerance of +/- 2mm

## Packing Information

Units per box: 1

- Box: a) 606x606x40 mm / 23.86"/23.86"/1.57";
- b) 1201x606x37 / 47.28"/23.86"/1.46".

Box Gross Weight:

## Technical Information

Material: VicPet Wool



## Fire Rating:

- Europe: Euroclass B -s2, d0
- USA: Class A (ASTM-E84) ; Flame Spread: 0; Smoke Development: 300.

Installation: Removable Suction Cups

## Certifications:



## More information:

[vicoustic.com/product/vicoffice-wall](http://vicoustic.com/product/vicoffice-wall)