

version 03/2023

	contains	m ²	ft ²	weight
1 pack Trendline 8 XL	6 planks	2,95 m ²	31.72 ft ²	21,1 kg
1 pallet Trendline 8 XL	54 packs	159,14 m ²	1712.92 ft ²	1159 kg

product specifications




Dimensions	2038 x 241 mm
Total thickness	8 mm
Bevels	4
Loc System	PentaLoc
Level of use according to European standard EN10874	23 heavy domestic use
	32 general commercial use
Residential warranty	20 years
Commercial warranty	5 years

composition

Surface layer	Direct laminated paper, impregnated with melamine resin.
Substrate	Moisture resistant High Density Fiberboard (HDF).
Backing	Direct laminated paper, impregnated with melamine resin.


test results

Abrasion resistance	EN13329	AC4 (IP≥4000)
Impact resistance	EN13329	small ball : ≥ 35 mm - big ball : ≥ 750 mm
Thickness swelling	ISO24336	≤ 18 %
Fire resistance	EN13501-1	Cfl-S1
Formaldehyde emission	EN717-1	E1
Slip resistance	EN13893	DS
Density	EN323	900 kg/m ³
Resistance to staining	EN438	5 (groups 1+2) ; 4 (group 3)
Effect of a furniture leg	EN16581	no damage (foot type 0)
Effect of a castor chair	EN425	no damage with type W wheels
Thermal resistance in combination with underlay Excellence Plus	ISO 8302	0,08 m ² K/W – Suitable for floor heating/cooling. Detailed instructions on www.berryalloc.com .



version 03/2023

What is a laminate floor made of?

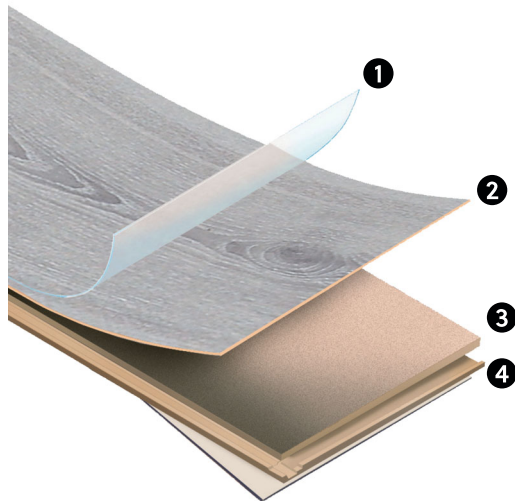

- ❶ An **overlay** that determines the strength and resistance of your floor
- ❷ A **decor paper** for the design
- ❸ A **high-density fibreboard** (HDF) core
- ❹ A **counterbalance** to stabilise and protect the HDF core