

VicStrip Lite Double PS WS



VicStrip Lite Double is a cost-effective product, made entirely from recycled fire-rated PET (raw material classified as B-s1,d0).

Designed to deliver the same quality and aesthetic appeal as VicStrip Double, the Lite version eliminates the laminate layer to offer a more accessible price point, while providing an eco-friendly and affordable solution for acoustic enhancement that retains the core performance and visual identity of its predecessor. Lightweight, flexible, and visually distinct, the panel is engineered to offer practical acoustic benefits alongside design versatility. The creative potential of VicStrip Lite is highlighted by its fresh palette of High-Density PET colours

Acoustic Performance



Technical Information

Dimensions: **A** 2400×595×12mm / 94.5"×23.4"×0.47";

B 2700×595×12mm / 106.3"×23.4"×0.47" (L×H×W, per panel)

Raw Materials: Fire-rated High-Density PET

Fire Rate: Europe: The raw material (HD PET 12 mm) used in this product is classified as B-s1,d0 according to EN 13501-1.

Note: The final product has not been individually tested for fire classification.

Acoustic Properties: Medium and High Frequencies Absorption

NRC: 0.40 (applied directly on the wall; 0.80 (mounted on 45mm batten with 40mm VicPET Wool behind)

Installation/Accessories: Flexi Glue Ultra


Packaging Information

Units per Box: 1 or 4 units/box; **Box Dimensions:** **A** BOX1: 2438×628×26mm / 96"×24.7"×1";

BOX4: 2438×628×64mm / 96"×24.7"×2.5"; **B** BOX1: 2738×628×26mm / 107.8"×24.7"×1";

BOX4: 2738×628×64mm / 107.8"×24.7"×2.5"; **Box Gross Weight:** **A** BOX1: 5.4kg / 11.9lb;

BOX4: 14.5kg / 32lb; **B** BOX1: 6.3kg / 13.9lb; BOX4: 17.7kg / 39lb

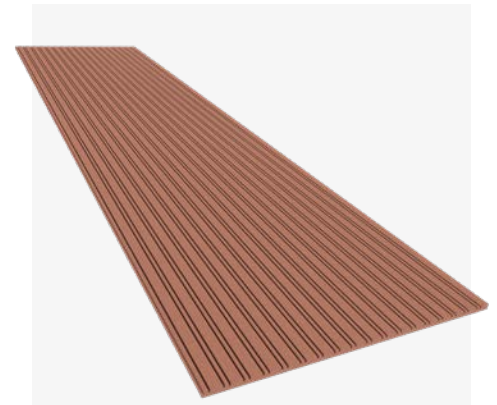

PET HD Colors



f(Hz)	Sound Absorption Coefficient (α)
100	0.01
125	0.01
160	0.02
200	0.03
250	0.04
315	0.05
400	0.07
500	0.15
630	0.25
800	0.36
1000	0.53
1250	0.65
1600	0.76
2000	0.81
2500	0.82
3150	0.84
4000	0.86
5000	0.87

Different product batches may show a color variation. Product dimensions of these panels have a tolerance of +/- 2mm. The product images used are illustrative and may differ from the actual product.

Info and Sales: sales@vicoustic.com

VICOUSTIC